




STANDARD TIME	OVERTIME
10:00	10:00
10:05	10:05
10:10	10:10
10:15	10:15
10:20	10:20
10:25	10:25
10:30	10:30
10:35	10:35
10:40	10:40
10:45	10:45
10:50	10:50
10:55	10:55
11:00	11:00
11:05	11:05
11:10	11:10
11:15	11:15
11:20	11:20
11:25	11:25
11:30	11:30
11:35	11:35
11:40	11:40
11:45	11:45
11:50	11:50
11:55	11:55
12:00	12:00
12:05	12:05
12:10	12:10
12:15	12:15
12:20	12:20
12:25	12:25
12:30	12:30
12:35	12:35
12:40	12:40
12:45	12:45
12:50	12:50
12:55	12:55
13:00	13:00
13:05	13:05
13:10	13:10
13:15	13:15
13:20	13:20
13:25	13:25
13:30	13:30
13:35	13:35
13:40	13:40
13:45	13:45
13:50	13:50
13:55	13:55
14:00	14:00
14:05	14:05
14:10	14:10
14:15	14:15
14:20	14:20
14:25	14:25
14:30	14:30
14:35	14:35
14:40	14:40
14:45	14:45
14:50	14:50
14:55	14:55
15:00	15:00
15:05	15:05
15:10	15:10
15:15	15:15
15:20	15:20
15:25	15:25
15:30	15:30
15:35	15:35
15:40	15:40
15:45	15:45
15:50	15:50
15:55	15:55
16:00	16:00
16:05	16:05
16:10	16:10
16:15	16:15
16:20	16:20
16:25	16:25
16:30	16:30
16:35	16:35
16:40	16:40
16:45	16:45
16:50	16:50
16:55	16:55
17:00	17:00
17:05	17:05
17:10	17:10
17:15	17:15
17:20	17:20
17:25	17:25
17:30	17:30
17:35	17:35
17:40	17:40
17:45	17:45
17:50	17:50
17:55	17:55
18:00	18:00
18:05	18:05
18:10	18:10
18:15	18:15
18:20	18:20
18:25	18:25
18:30	18:30
18:35	18:35
18:40	18:40
18:45	18:45
18:50	18:50
18:55	18:55
19:00	19:00
19:05	19:05
19:10	19:10
19:15	19:15
19:20	19:20
19:25	19:25
19:30	19:30
19:35	19:35
19:40	19:40
19:45	19:45
19:50	19:50
19:55	19:55
20:00	20:00
20:05	20:05
20:10	20:10
20:15	20:15
20:20	20:20
20:25	20:25
20:30	20:30
20:35	20:35
20:40	20:40
20:45	20:45
20:50	20:50
20:55	20:55
21:00	21:00
21:05	21:05
21:10	21:10
21:15	21:15
21:20	21:20
21:25	21:25
21:30	21:30
21:35	21:35

MANUFACTURER			
H.P. / K.W. / K.V.A			
R.P.M	FRAME	TYPE	POLES
VOLTS	AMPS		
MODEL	STYLE		
DESIGN	CODE	FORM	
PHASE	HZ	TEMP. RISE	
SERIAL NUMBER			
SVC.FACTOR			
DELIVERY DATE			
NOTES			

- |                                  | SHORT) | CENTER) | LONG)  |
|----------------------------------|--------|---------|--------|
| A) KNUCKLE LIFT                  |        |         |        |
| B) LE EXTENSION                  |        |         |        |
| C) OLE EXTENSION                 |        |         |        |
| D) TOTAL COIL LENGTH             |        |         |        |
| E) STATOR BORE                   |        |         |        |
| F) CORE LENGTH                   |        |         |        |
| G) FINGER PLATE                  |        |         |        |
| H) SLOT WIDTH                    |        |         |        |
| I) DEPTH UNDER WEDGE             |        |         |        |
| J) TOTAL SLOT DEPTH              |        |         |        |
| K) BELOW SLOT IRON               |        |         |        |
| L) LE RING 1 ID                  |        |         |        |
| M) LE RING 2 ID                  |        |         |        |
| N) LE RING 1 DISTANCE FROM IRON  |        |         |        |
| O) LE RING 2 DISTANCE FROM IRON  |        |         |        |
| P) OLE RING 1 ID                 |        |         |        |
| Q) OLE RING 2 ID                 |        |         |        |
| R) OLE RING 1 DISTANCE FROM IRON |        |         |        |
| S) OLE RING 2 DISTANCE FROM IRON |        |         |        |
| T) TOOTH WIDTH                   | TOP    |         | BOTTOM |
| U) COIL TOP STRAIGHT LENGTH      |        |         |        |
| V) COIL BOTTOM STRAIGHT LENGTH   |        |         |        |
| W) NUMBER OF VENTS/DUCTS         |        |         |        |
| X) WIDTH OF VENTS/DUCTS          |        |         |        |

STANDARD VPI  
PREMIUM VPI  
INVERTER DUTY VPI  
VARNISH TREATED CLASS F  
B-STAGE RESIN RICH

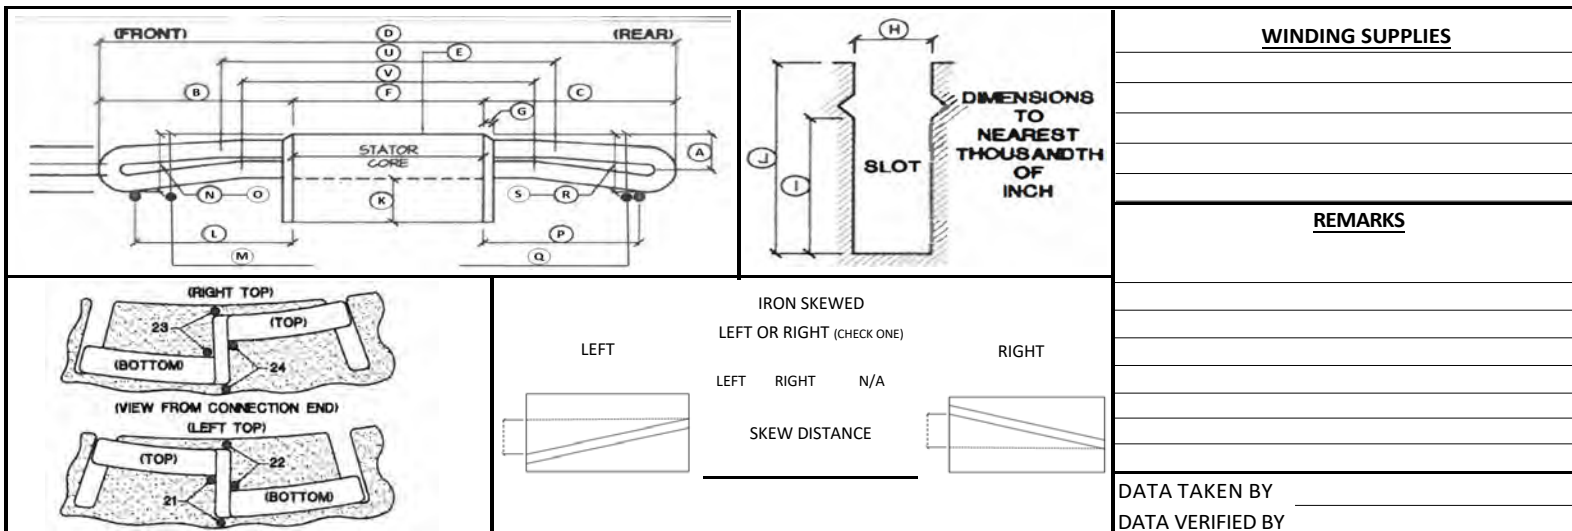

## FORM 3-1 10.24.19, REV. 2